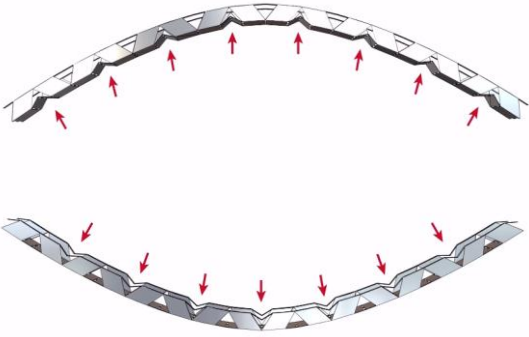


# iProfili

## FLEXIBLE CONCAVEX STUD DATASHEET

CHARACTERISTICS	VALUE	UNIT OF MEASUREMENT	REGULATIONS
Steel type	DX51D	-	EN10346
Fire reaction	A1	-	EN14195
Thickness	0,6	mm	EN10143
Protective coating class	Z140	-	EN10346
Tensile enervation	300	N/mm <sup>2</sup>	EN10143
Storage	Protect from atmospheric agents		

PHOTOGRAFIC RELIEF	NAME	DESCRIPTION	DIMENSIONS
	CONCAVEX 60x27 mm	<p>Unique stud for Concave and Convex curves. Possibility of bidirectional bending according to needs.</p> <p>Measures: 3000x60x27 mm Minimum radius: 110 mm</p>	